

LINEAR POLARIZED GROUND ANTENNA

SlimLine - A6590L

ABOUT TIMES-7

Pushing the boundaries of RFID technology worldwide Times-7 are leaders in RFID antenna design and manufacture. Our patented award winning UHF antennas meet the needs of virtually any industry application; providing customers with fast accurate tracking of products, assets & people; empowering organizations to transform processes & reduce costs.

Our SlimLine range of antennas is unique in the RFID industry; offering high levels of performance & durability in an aesthetically superior form. Proven in a diverse & growing range of markets, applications include: retail & customer interaction, conference & people tracking, race timing, baggage handling, and logistic & supply chain asset management.

RFID4u Authorized Reseller:
Store RFID4UStore
www.rfid4ustore.com
1-408-739-3500
sales@rfid4ustore.com


Times-7 Research Ltd
 29 Railway Avenue
 Lower Hutt 5010
 New Zealand

NEW ZEALAND
 P: +64 4 974 6566

USA/CANADA
 P: +1 858 225 2214

E: info@times-7.com

www.times-7.com

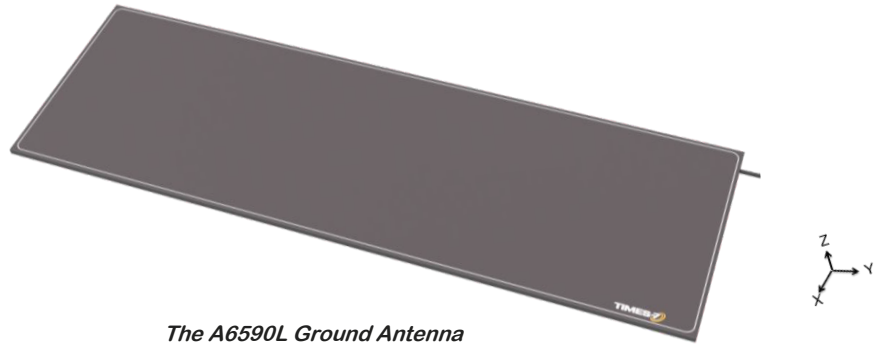

The A6590L Ground Antenna

Part of Times-7's exclusively unique range of ground antennas the A6590L is optimized for RFID deployments involving moving products, assets and people. From conference attendee & people tracking, retail presence aware / loyalty marketing, & race timing, the A6590L is ideal for situations where traditional side antennas are unsuitable or not optimized for the application.

At just 8 mm / 0.3 in. thick, the durable, high performance A6590L is uniquely capable of lying flat on the ground within a doorway sized footprint, and can withstand payloads of over 200 kg (440 lb).

Ultra-low profile linear polarised UHF ground antenna

Just 8 mm / 0.3 in. thick

Typical applications:

Conference attendee & people tracking,
 retail marketing,
 race & event timing

Specifications


Physical / Environmental Specifications

Dimensions (L x W x D):	910 mm x 300 mm x 8 mm 3' x 1' x 0.3"
Weight:	2 kg / 4.4 lbs.
Radome Material:	Fire retardant ABS
Environmental Rating:	IP65
Operating / Storage Temperature:	-20° to +55°C / -30° to +65°C -4° to +131°F / -22° to +149°F
Connector type / position:	SMA female side fly lead (300 mm / 1 ft.) or 6ft / 2m cable to RP-TNC Plug


Electrical Specifications

Frequency Range:	864-868 MHz / 902-928 MHz
Polarization:	Linear
Far-field Gain:	10 dBi
Far-field 3 dB beamwidth:	72° in XZ, 23° in YZ
Typical VSWR across frequency range:	< 1.4:1
Front to back ratio:	20 dB
Nominal Impedance:	50 Ω
Anti-static protection:	Yes
Maximum Input Power:	6 W

E-field elevation & Azimuth Patterns

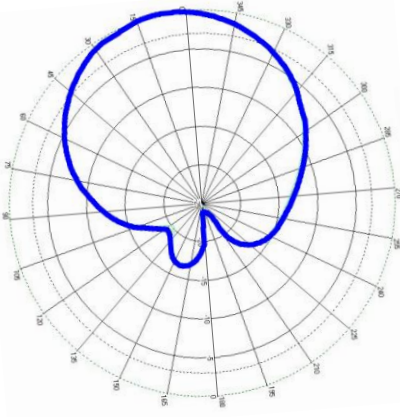

XZ-plane

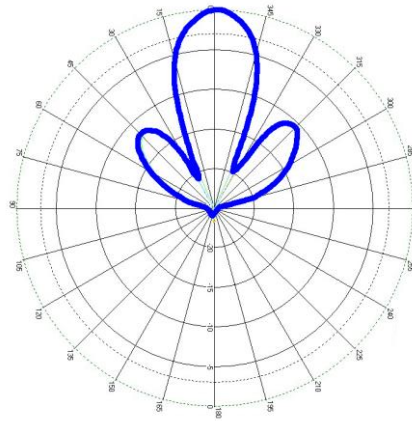

YZ-plane

Ordering Information (please quote both product code & part no.)

Product Code	Band	Part No.
A6590L	ETSI 864-868 MHz	71234
A6590L	FCC 902-928 MHz	71211
Cable Accessories	Cable Type	Part No.
Cable 2 m, SMA to RPTNC	195 / 240	71436 / 71782
Cable 4 m, SMA to RPTNC	195 / 240	71437 / 71784
Cable 8 m, SMA to RPTNC	195 / 240	71438 / 71788

Applications

- Conference Attendee / People Tracking
- Retail Presence Aware / Loyalty Based Marketing
- Race & Event Timing



Authorized Reseller:
RFID4u
 Store
 RFID4Ustore
www.rfid4ustore.com
 1-408-739-3500
sales@rfid4ustore.com

Times-7 Research Ltd
 29 Railway Avenue
 Lower Hutt 5010
 New Zealand

NEW ZEALAND
 P: +64 4 974 6566

USA/CANADA
 P: +1 858 225 2214

E: info@times-7.com

www.times-7.com

The technical data contained in this publication is not a guarantee for which Times-7 Research Ltd assumes legal accountability. It is indicative of typical performance, and if required should be relied on for specific applications only after due verification.

All technical data, specifications and other information contained herein are deemed to be the proprietary intellectual property of Times-7 Research Ltd. No reproduction, copy or use thereof may be made without the express written consent of Times-7 Research Ltd.